

HEAT SEAL

®

SHRINK PACKAGING SYSTEMS

MODEL HDS-215

SEMI-AUTOMATIC COMBINATION SHRINK SYSTEM



**HEAVY DUTY CONSTRUCTION
THROUGHOUT**

**STANDARD HOT KNIFE OR
REYNOLDS DUO-SEAL®
SYSTEM AVAILABLE**

Features Available on the HDS-215

- Standard 220 Volt Power Supply
- Top Mounted, Easy Access U.L. Listed Control Panel
- Individually Controlled Seal Bars
- Large 15" By 20" Sealing Area, Ideal For Printers
- Cast Aluminum Seal Head With Film Clamps
- Easily Adjustable Seal Arm Height
- Adjustable Seal Pads
- Dual Magnets With Adjustable Pressure And Dwell Time
- Posi-Trac Power Take Away Conveyor
- Film Perforator With Individually Adjustable Collars
- Adjustable Film Cradles
- Exterior Cool To The Touch Tunnel Insulation
- Acc-U-Temp Digital Tunnel Temperature Control
- 6" High By 15" Wide Tunnel Opening (8" High Optional)
- Adjustable Heat Tunnel Conveyor Belt For Bottom Shrink Control
- 4,100 Watt Tunnel
- Built In Automatic Tunnel Cool Down
- Synchronized Power Take Away And Tunnel Conveyor Height Adjustments Allow For Smooth Product Transition
- Package Centering Lateral Tunnel Conveyor Alignment System
- Heavy Duty Casters And Levelers
- Stainless Steel Model Available

TWO YEAR WARRANTY


HEAVY DUTY SERIES

Machine Specifications


Film Capacity	20" Wide (51 cm)
L Bar Seal Area	15" W, 20" L (38 W, 51 L cm)
Inside Tunnel Dimensions	6" H, 14 1/2" W, 21" L (15 H, 37 W, 53 L cm)
Overall Dimensions	57" H, 29" W, 76" L (145 H, 74 W, 193 L cm)
Working Height	37" (94 cm)
Power Requirement	220 Volts, 25 Amp Single Circuit with Ground
Wattage	3,600 Watts: Tunnel 500 Watts: Conveyor Belt
Tunnel Conveyor Speed	0-20 Feet Per Minute
Weight	625 lbs. (284 kg)

Machine Footprint

TOP VIEW

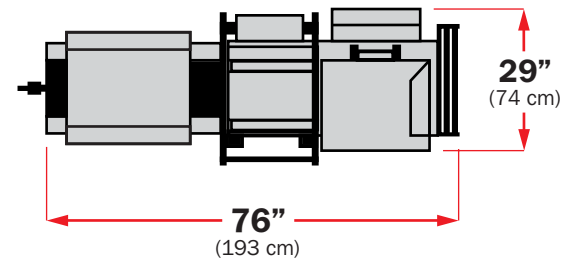

FRONT VIEW

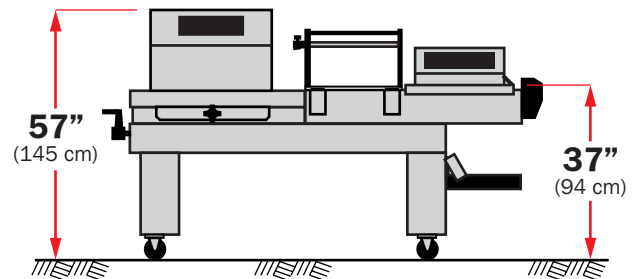

TWO YEAR WARRANTY

Machine Options

- 8" High Tunnel Opening
- Hot Hole Punch
- 6" Film Separator Rod
- Dual Film Rack
- Powered Lift/Posi-Trac Power Take Away Conveyor
- Extended Seal Area (15" By 24")
- Left Hand Reverse Flow
- Adjustable Hot Hole Punch With Articulated Arm
- Roller Drip Pan Or Corrugated Loading Tray
- Stainless Steel Construction
- Beaded Seal Impulse Wire System
- Reynolds Duo-Seal®
- Spare Parts Kit
- Air Activated Seal Head
- Powered Unwind With Perforating Roller And 6" Adjustable Inverting Head
- GTC-180/GTC-90 Gravity Turn Around Conveyors
- Powered Accumulator Tables

For Additional Product Information, Contact:



HEAT SEALING EQUIPMENT LLC
4580 EAST 71ST STREET CLEVELAND, OHIO 44125

PHONE (216)341 2022 TOLL FREE (800)342 6329 FAX (216)341 2163
WORLD WIDE WEB www.heatsealco.com E-MAIL custserv@heatsealco.com



MODEL HDS-215 HEAVY DUTY SERIES