



ON DEMAND SEAL PLATE SIGNIFICANTLY REDUCES ENERGY CONSUMPTION

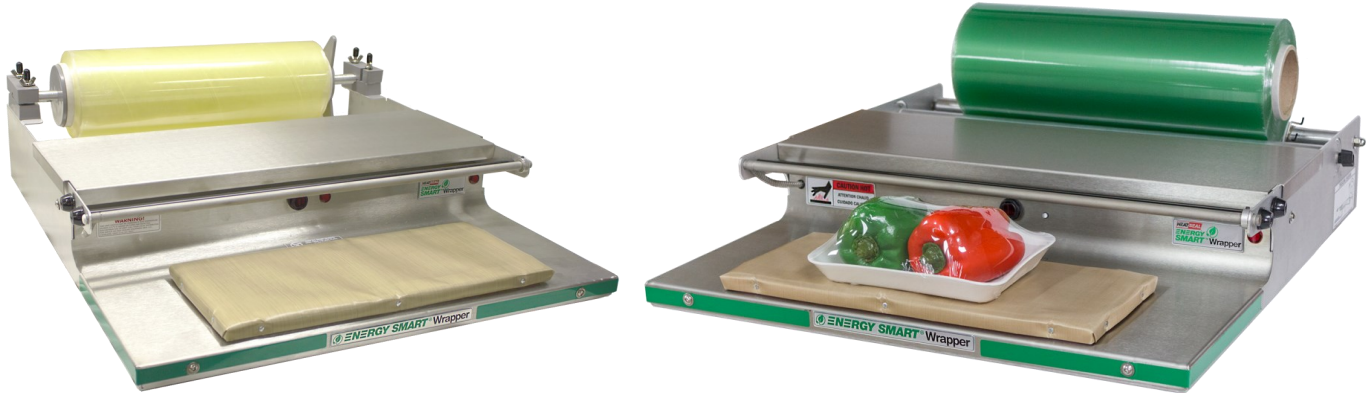

**FEATURES**

- Fixed Distance Photoeye to Detect All Tray Colors
- Electronic Temperature Controlled Film Cut Off Rod
- Two Color LED for Photoeye Indication is Amber to Convey Seal Plate Heating, and Red when Seal Plate Reaches Sealing Temperature
- NEW Circuit Breakers Replace Fuses for Fast and Easy Reset with Less Maintenance
- On-Demand Timer Controlled Heated Seal Plate That Significantly Reduces Power Consumption by 80%
- Seal Plate Reaches Seal Temperature Within Seconds
- Thermistor Controlled Circuit that Reduces Power Consumption as Residual Heat Increases in Seal Plate
- GFCI for Improved Circuit Integrity and Protection
- Stainless Steel Front Plate for Easy Wipe Down
- Rigid Aluminum And Stainless Steel Construction
- Stainless Steel Wrapping Surface
- 18"- 20" Maximum Roll Width, Depending On Model
- 8" Maximum Roll Diameter
- Supplied With A Replaceable Non-Stick Cover to Maintain A Hygienic Seal Surface
- Local Utility Rebates may be Available

**MODEL SPECS**

MODEL	725ES	700ES
FILM CAPACITY	18"	20"
HOT PLATE	6" x 15"	
OVERALL DIMENSIONS	24.75" D, 23" W, 9" H (63 D, 59 W, 23 H cm)	
ELECTRICAL SPECIFICATIONS	 115 Volt, 60Hz, 132 Watts	
WEIGHT	28 lbs. (13 kg)	
OTHER FEATURES	Great Film Control	No Assembly Required, Quick Film Changeover

