

4


3

2

1

REVISION HISTORY

REV	ECN NO.	DATE	BY	DESCRIPTION
1	1963	9/26/2007	BMC	ADDED ADDITIONAL SPECIFICATIONS
2	3327	3/24/2016	JWM	CHANGED STRIP LENGTH FROM 1/4" TO 5/16".
3	4423	7/11/2023	NS	ADDED WHITE TIE NOTE

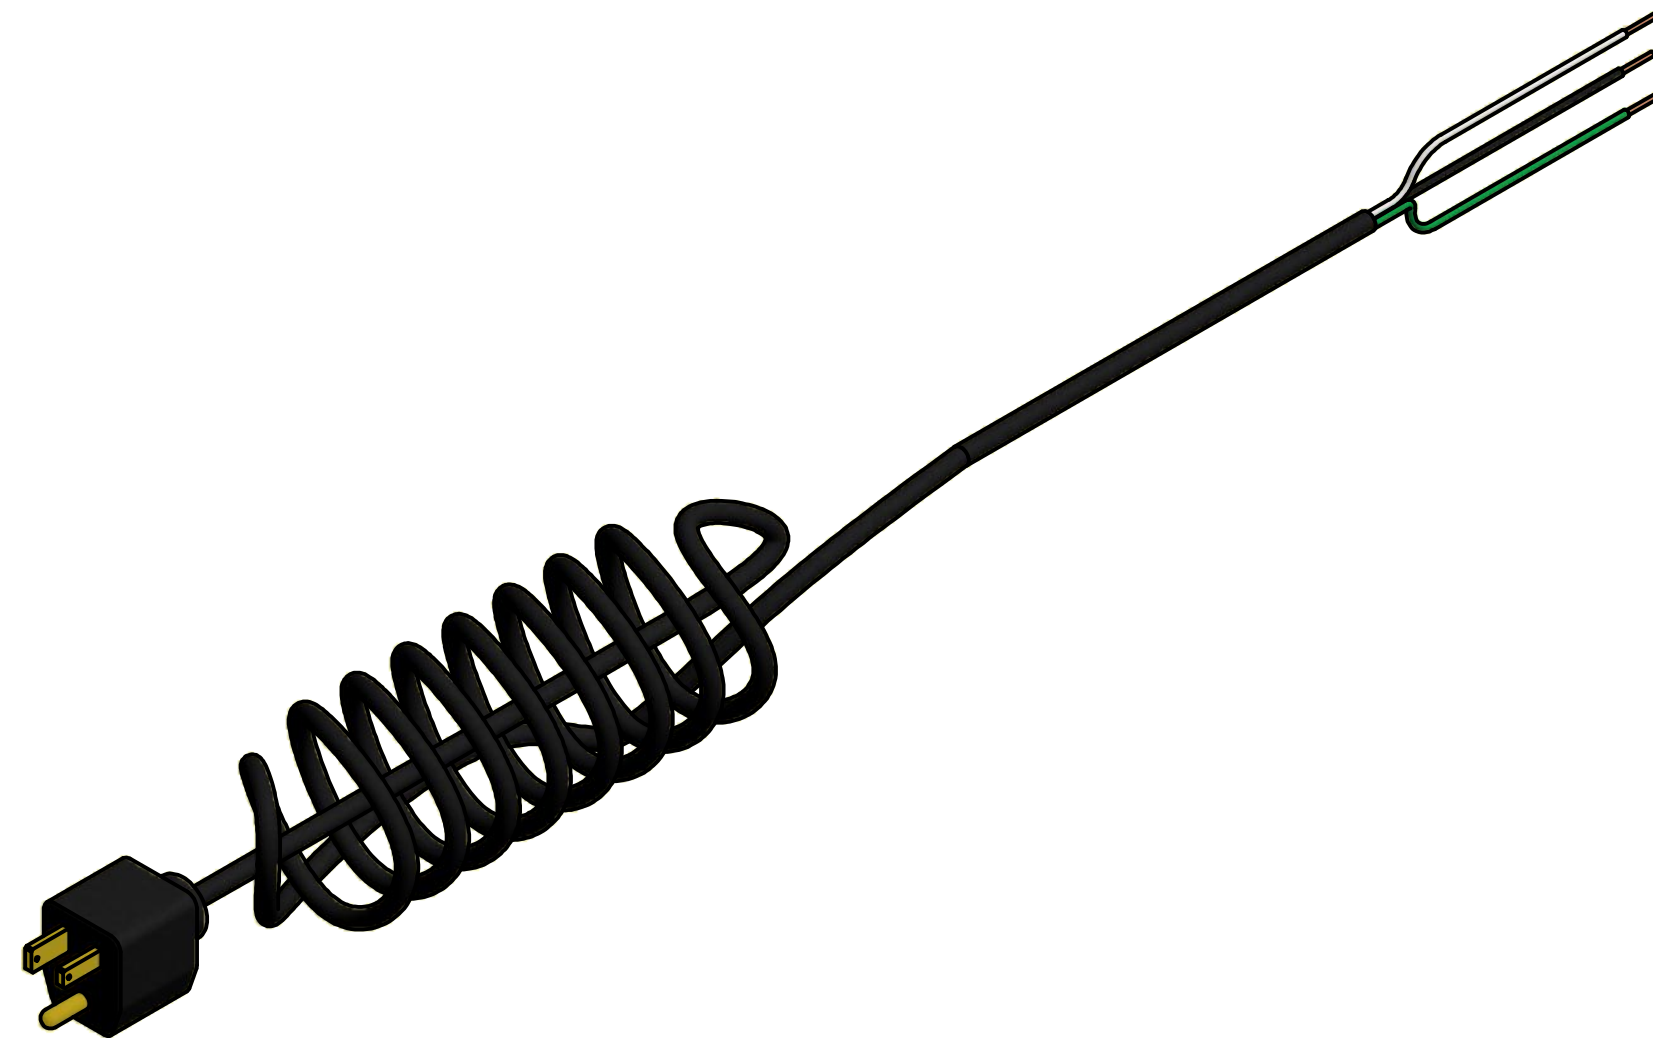

RATINGS

TEMPERATURE: 60° C
VOLTAGE: 300 VOLTS

CONDUCTOR

GAUGE: 16 AWG
NUMBER OF STRANDS: 26
COLOR CODE: 1 BLACK, 1 WHITE, 1 GREEN

OUTER JACKET

COLOR: BLACK
OUTER DIAMETER: 0.36 MAX

SPECIFICATIONS

LENGTH OF STRIPPED OUTER JACKET: 5.75 INCHES
LENGTH OF STRIPPED INSULATED WIRE: 0.31 INCH.
OVERALL CORD LENGTH: 84 INCHES (7FT)
SECURE CORD BUNDLE WITH WHITE WIRE TIE
MUST PASS 1200V HIPOT TEST FROM BLACK & WHITE TO GREEN

NOTE

TYPE SJT POWER CORD, UL LISTED AND CSA CERTIFIED (MARKED CSA), TERMINATED IN A MOLDED ON PARALLEL BLADE ATTACHMENT PLUG CAP HAVING AN INTEGRAL ROUND GROUNDING PIN.

HEAT SEAL/AMPAK
CLEVELAND, OHIO 44125

<p>CONFIDENTIAL THIS PRINT IS PROPERTY OF, AND DISCLOSES PROPRIETARY INFORMATION OF HEAT SEAL. IT IS LOANED FOR REFERENCE ONLY, AND MAY NOT BE REPRODUCED OR FORWARDED ELECTRONICALLY IN ANY MANNER, OR ITS CONTENTS DISCLOSED TO OTHERS, WITHOUT THE EXPLICIT WRITTEN PERMISSION OF OWNER AND MUST BE DESTROYED UPON REQUEST.</p>	UNLESS OTHERWISE SPECIFIED:	CREATED: 9/26/2007	DESCRIPTION: Power Cord 3-16, SJT, 84 IN. LG.
	ALL DIMENSIONS IN INCHES	CREATED BY: BRUCE	DRAWING NUMBER: 1851-051
	STANDARD TOLERANCES: 0.00: ± .010 0.000: ± .005 ANGLE: ± 1'	CHECKED:	REVISION: 3
		CHECKED BY:	SIZE: B SCALE: NONE SHEET: 1 OF: 1

4

3

2

1