

4


3

2

1

REVISION HISTORY

| REV | ECN NO. | DATE | BY | DESCRIPTION |
|-----|---------|-----------|-----|--|
| 0 | 2416 | 10/15/09 | JAS | CREATED DRAWING IN INVENTOR |
| 1 | 3257 | 1/7/2016 | EMT | ADD GRD TEST NOTE |
| 2 | 3327 | 3/18/2016 | JWM | CHANGED STRIP LENGTH FROM 1/4" TO 5/16". |
| 3 | 4423 | 7/11/2023 | NS | ADDED BLACK TIE NOTE |

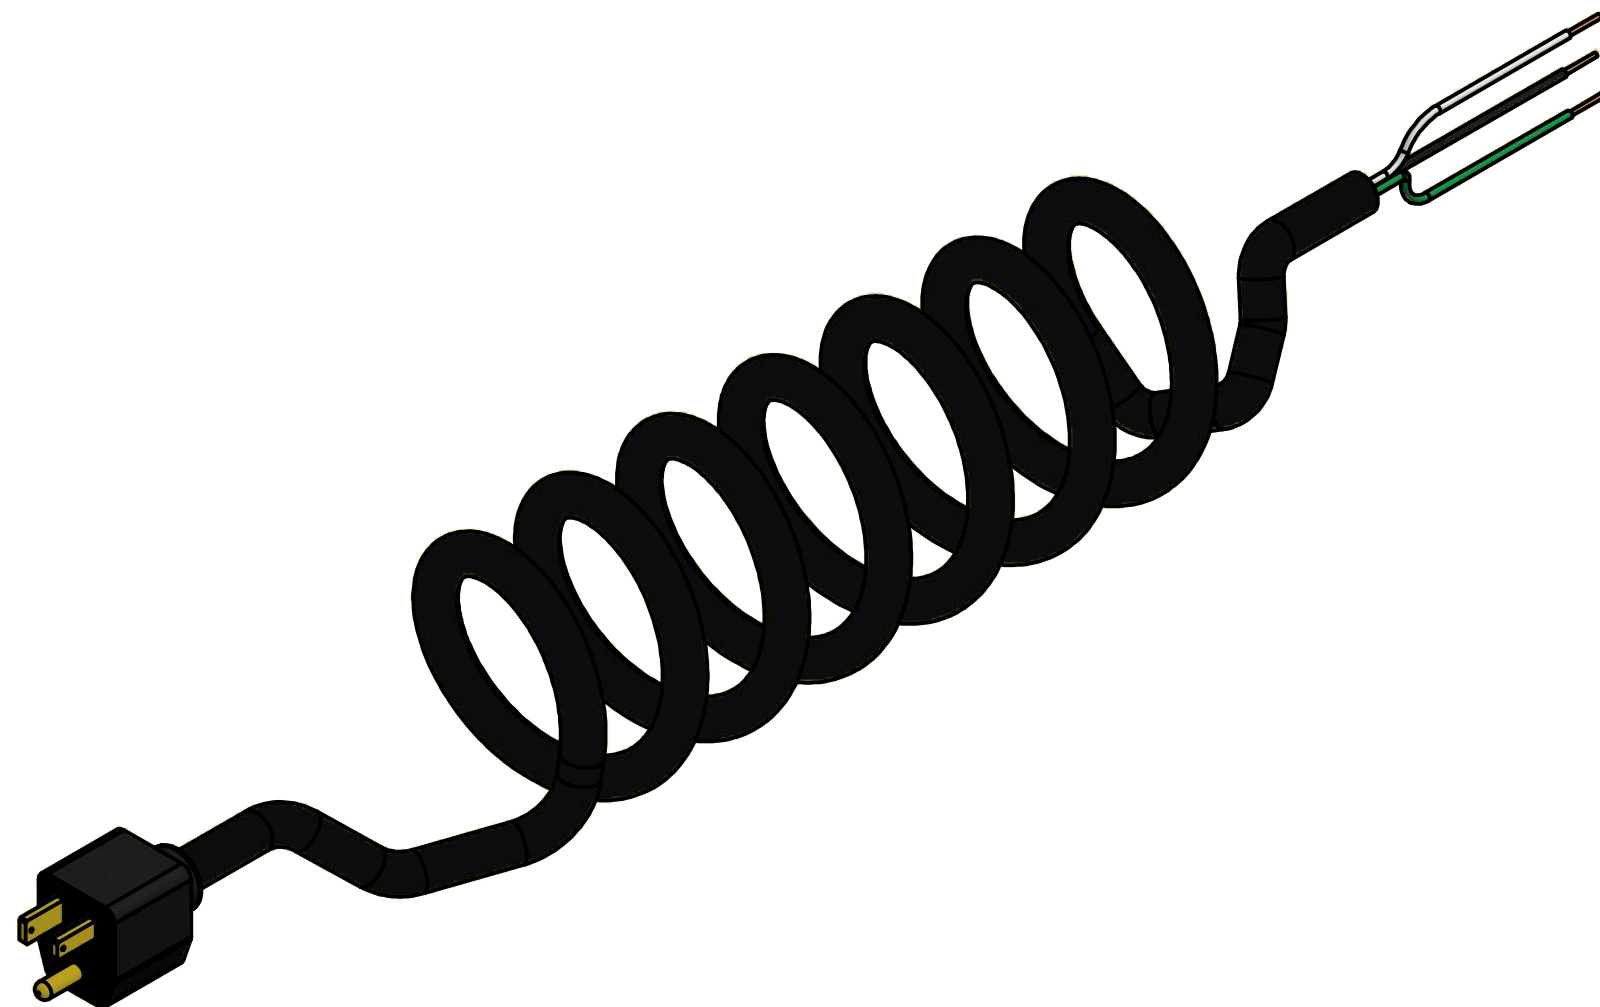

RATINGS

TEMPERATURE: 60° C
VOLTAGE: 300 VOLTS

CONDUCTOR

GAUGE: 16 AWG
NUMBER OF STRANDS: 26
COLOR CODE: 1 BLACK, 1 WHITE, 1 GREEN;

OUTER JACKET

COLOR: BLACK
OUTER DIAMETER: 0.36 MAX

SPECIFICATIONS

LENGTH OF STRIPPED OUTER JACKET: 6 INCHES
LENGTH OF STRIPPED INSULATED WIRE: 0.31 INCH
OVERALL CORD LENGTH: 60 INCHES (5FT)
SECURE CORD BUNDLE WITH BLACK WIRE TIE
MUST PASS 1200V HIPOT TEST FROM BLACK & WHITE TO GREEN

NOTE

TYPE SJT POWER CORD, UL LISTED AND CSA CERTIFIED (MARKED CSA), TERMINATED IN A MOLDED-ON PARALLEL BLADE ATTACHMENT PLUG CAP HAVING AN INTEGRAL ROUND GROUNDING PIN.

HEAT SEAL/AMPAK

CLEVELAND, OHIO 44125

| | | | | |
|--|--|-----------------------|---|-------------|
| <p>CONFIDENTIAL THIS PRINT IS PROPERTY OF, AND DISCLOSES PROPRIETARY INFORMATION OF HEAT SEAL. IT IS LOANED FOR REFERENCE ONLY, AND MAY NOT BE REPRODUCED OR FORWARDED ELECTRONICALLY IN ANY MANNER, OR ITS CONTENTS DISCLOSED TO OTHERS, WITHOUT THE EXPLICIT WRITTEN PERMISSION OF OWNER AND MUST BE DESTROYED UPON REQUEST.</p> | UNLESS OTHERWISE SPECIFIED: | CREATED: 9/26/2007 | DESCRIPTION: Power Cord 3-16, SJT, 60 IN. LG. | |
| | ALL DIMENSIONS IN INCHES | CREATED BY: BRUCE | DRAWING NUMBER: 1851-052 | |
| | STANDARD TOLERANCES: 0.00: ± .010 0.000: ± .005 ANGLE: ± 1' | CHECKED: | REVISION: 3 | |
| | | CHECKED BY: | SIZE: B | SCALE: NONE |

SHEET: 1 OF: 1

4

3

2

1