NOTES:

8


Α

 \rightarrow

1. INSPECTION: DRY FIT 6430-190 ONTO A 2" OD POLE. IT SHOULD ROTATE FREELY 2. INSERT 1869-073 GROMMET AND 1903-870 SCREW.

3

3. PACKAGE USING 3320-103.

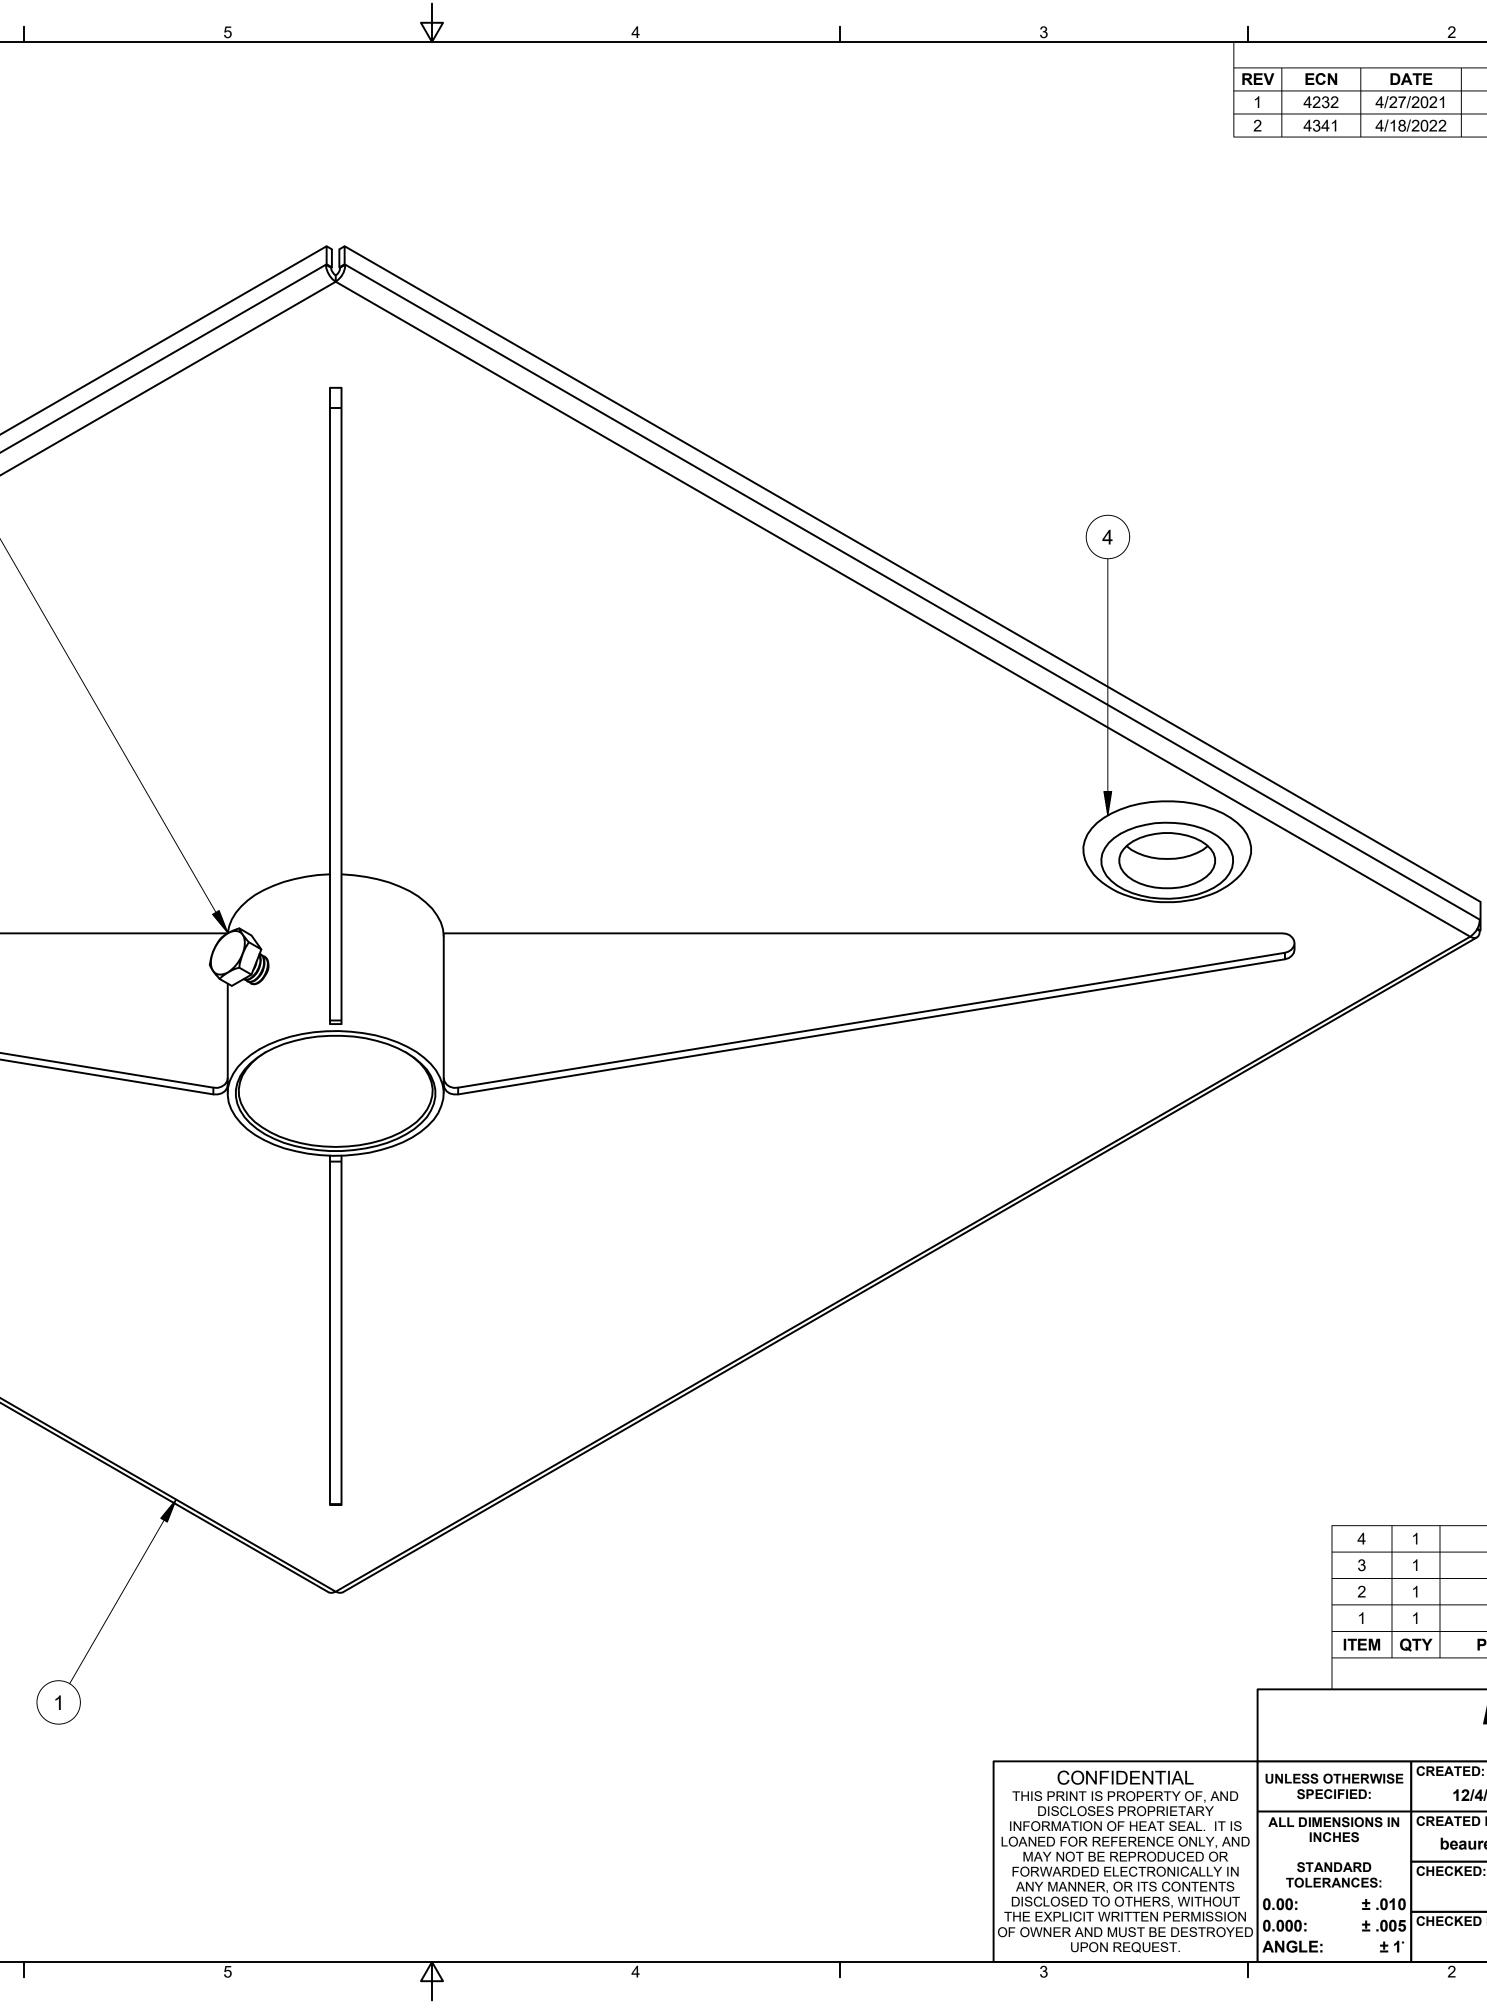

| | 4 1 | | 1 | 1869-073 | | GROMMET, SBR, FOR 1.38" HOLE, 1" ID | | | | |
|--------------------|--|-------------------------|----------|-------------|-------------------------------------|-------------------------------------|--------|------|--------|------------------|
| 3 | | 1 | 1903-870 | | SCR, HEX HD, SS, 5/16-18 X 3/8" LG | | | | | |
| 2 | | 1 | 3320-103 | | CARTON, FOL, 32ECT, 24 X 3-1/2 X 18 | | | | | |
| 1 | | 1 | 6430-190 | | SHELF ASSEMBLY, PRINTER | | | | | |
| ITEM C | | QTY | PART NUM | BER | DESCRIPTION | | | | | |
| | Material Specification | | | | | | | | | |
| | HEAT SEAL/AMPAK CLEVELAND, OHIO 44125 | | | | | | | | | |
| | UNLESS OTHERWISE SPECIFIED: | | CRE | ATED: | DESCRIPTION: | | | | | |
| DF, AND ARY | | | | 12/4/2015 | | | | | | |
| AL. IT IS | | IMENSIONS IN | | ATED BY: | PRINTER SHELF TOP ASSY | | | | | |
| NLY, AND ED OR | INCHES | | | beauregardk | | | | | | |
| ALLY IN | | STANDARD TOLERANCES: | | CKED: | DRAWING | | : | | | REVISION: |
| ITENTS /ITHOUT | 0.00: | ± .01 | ol | | 6430-197 2 | | | | | 2 |
| MISSION STROYED | 0 000. | ± .00 | | CKED BY: | | | | | | |
| | ANGLE: | ± 1 | • | | SIZE: | D | SCALE: | NONE | SHEET: | 1 OF: 1 |
| | | | | 2 | | | | | 1 | |

| | | 2 | | 1 | | | | | |
|------------------|------|-----------|---------|---|--|--|--|--|--|
| REVISION HISTORY | | | | | | | | | |
| | ECN | DATE | DONE BY | DESCRIPTION | | | | | |
| | 4232 | 4/27/2021 | NS | ADDED 1869-073, REPLACED 1923-002 WITH 1903-870 | | | | | |
| | 4341 | 4/18/2022 | NS | ADDED 3320-103 | | | | | |
| | | | | | | | | | |