


HEAT SEAL INNOVATION — THE INDUSTRIES ONLY NSF CERTIFIED & ENERGY SMART OVERWRAPPER

FEATURES

- Innovative Seal Plate Design with 10 Independent Heat Zones that Allow for Continued Use of Seal Plate in the Event of Damage Without Immediate Replacement
- Polyamide Film Wrap Seals & Protects Seal Plate from Moisture
- Photo Eye Detects All Tray Colors Consistently & Initiates Heating Cycle
- Dual LED Light Indicator Indicates Heating Status
- Energy Smart Microprocessor Reduces Power Consumption by 80%
- Local Utility Rebates may be Available



MODEL SPECS

MODEL	700ES Mini	
FILM MOUNT	Cradle System	
FILM CAPACITY	13" Maximum Roll Width, 9" Maximum Roll Diameter	
SEAL PLATE	6" x 15"	
OVERALL DIMENSIONS		23.5" D, 15.5" W, 5" H (60 D, 40 W, 13 H cm)
ELECTRICAL SPECIFICATIONS	115 Volt, 60Hz, 132 Watts	
WEIGHT	23 lbs. (13kg)	
OTHER FEATURES	No Assembly Required, Quick Film Changeover	
COMPARABLE TO	625A Mini	



OTHER FEATURES


- Square Edged Hot Rod Cuts Film with Ease
- Circuit Breakers Allow for Fast, Easy Reset and Low Maintenance
- Rigid Aluminum and Stainless Steel Construction
- Supplied with a Replaceable Non-Stick Cover to Maintain a Hygienic Sealing Surface

SERIES D REPLACEMENT PARTS

6" x 15" Circuit Board
(1818-037)

Series D Seal Plate 6" x 15"
(6137-245)

Square Film Cut Off Rod
(1824-031)

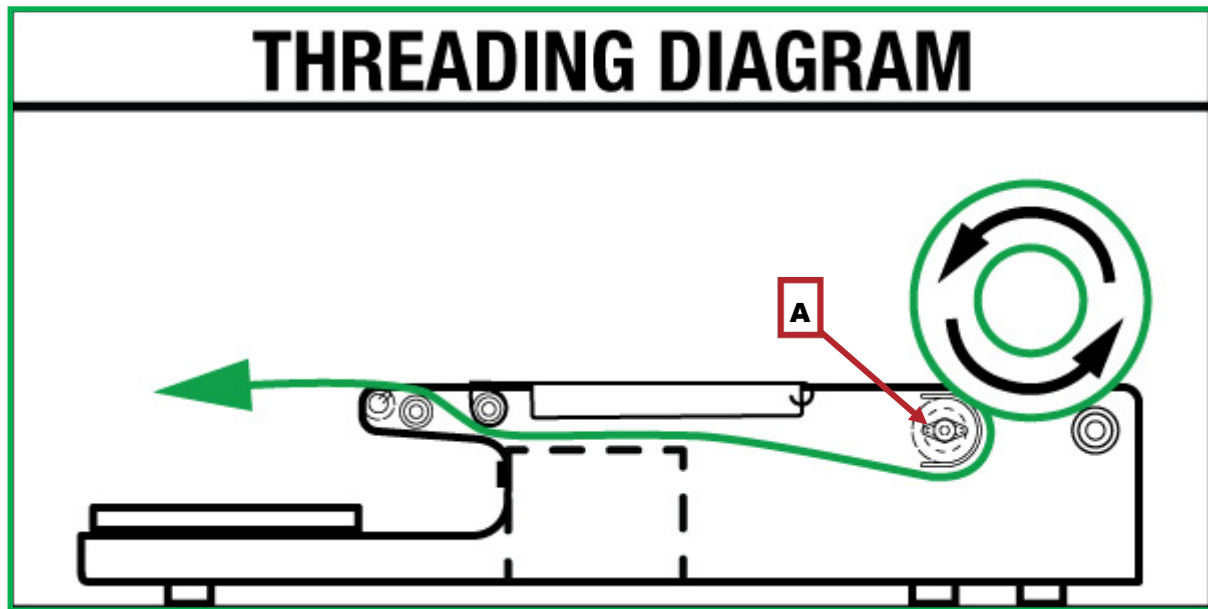

FILM THREADING

1. Facing the tension knob (A) side of the machine, the film should come off the roll counter-clockwise and **pass in-between the two rollers it sits on.**
2. Pull the film under the wrapping bridge and cut it with the hot rod.
3. The black tension knob (A) can be adjusted for proper tension on the film.

