



KEY FEATURES & BENEFITS

MEET THE HEAT SEAL HSE216

Meet the versatile shrink system built for simple operation, reliable sealing, and consistent results. Featuring a spacious sealing area, adjustable product handling, and controlled tunnel performance, this expandable system helps improve productivity, reduce film waste, and accommodate a wide range of packaging applications.

HSE216

COMBO SHRINK SYSTEM

Simple, Intuitive Operation

The Express Control Panel provides straightforward machine controls for quick setup and easy operation, while the single-plug 115V power supply allows fast installation in most production environments.

Large, Versatile Sealing Area

A spacious 16" x 20" sealing area, adjustable height sealing platform, and standard film clamps accommodate a wide variety of package sizes while ensuring consistent product positioning.

Reliable, High-Quality Sealing

The impulse wire sealing system, balanced magnetic hold-down, and pre-wired sealing conveyor capability deliver clean, consistent seals with the flexibility to expand production as your needs grow.

Efficient, Controlled Shrink Performance


Independent tunnel temperature control and a non-stick mesh conveyor belt provide even heat distribution for professional shrink results, while the automatic cool-down cycle helps extend heating element life.

Designed for Productivity

Four individually adjustable perforating wheels and an adjustable film cradle improve film handling, reduce waste, and help operators maintain efficient packaging speeds.

Built to Grow with Your Operation

Backed by a two-year limited warranty, the system can be customized with optional accessories including a leg kit, silicone sealing conveyor, and heated hole punch.

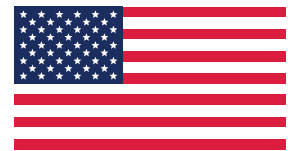

ENGINEERED, FABRICATED, AND
ASSEMBLED IN THE U.S.A.





Scan For More Info

Model Specs	Details
Model Number	HSE216
Overall Machine Dimensions (L x W x H)	72 × 24 × 24/52 in (1829 × 610 × 1321 mm)
Inside Tunnel Dimensions (L x W x H)	20 × 15 × 6 in (508 × 381 × 152 mm)
L Bar Seal Area (L x W)	20 × 16 in (510 × 410 mm)
Film Capacity (W)	20 in (500 mm)
Tunnel Conveyor Speed	25 FPM (7.6 MPM)
Working Height	36 in (920 mm) - (w/ Leg Kit)
Power Requirements	115 V, 17 A, Tunnel Wattage - 2,000
Weight	350 lb (158 kg)
Warranty	Limited 2 Year

OPTIONS

- Leg Kit
- Silicone Sealing Conveyor
- Heated Hole Punch

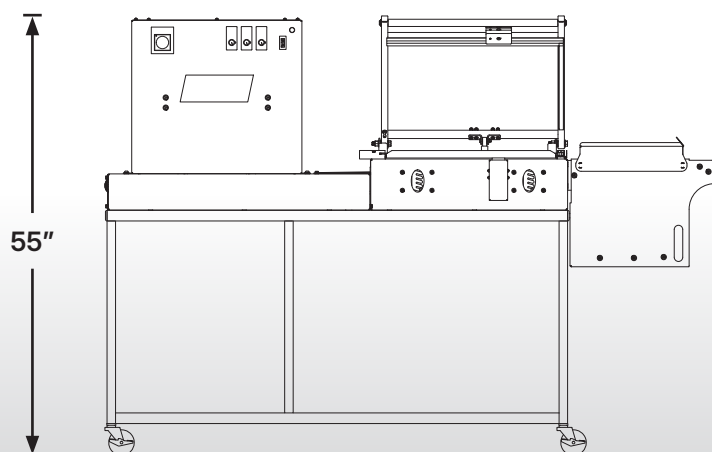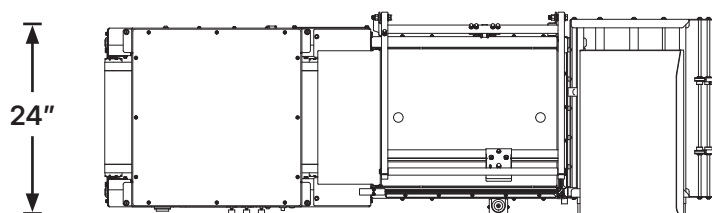

76.5"

APPLICATIONS

Food & Bakery Packaging


Seal poly bags for baked goods, produce, frozen foods, and deli items with clean, consistent results.

Retail & Specialty Products

Ideal for apparel, printed materials, gift sets, and promotional items requiring a professional finish.

Light Manufacturing & Contract Packaging

Flexible setup and adjustable controls make it ideal for short runs and multi-product operations.

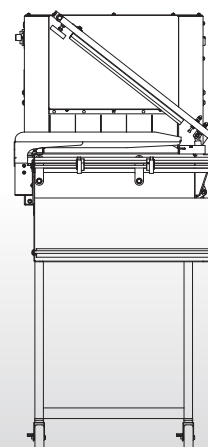

24"