



750ES SETUP & TROUBLESHOOTING

THREADING DIAGRAM

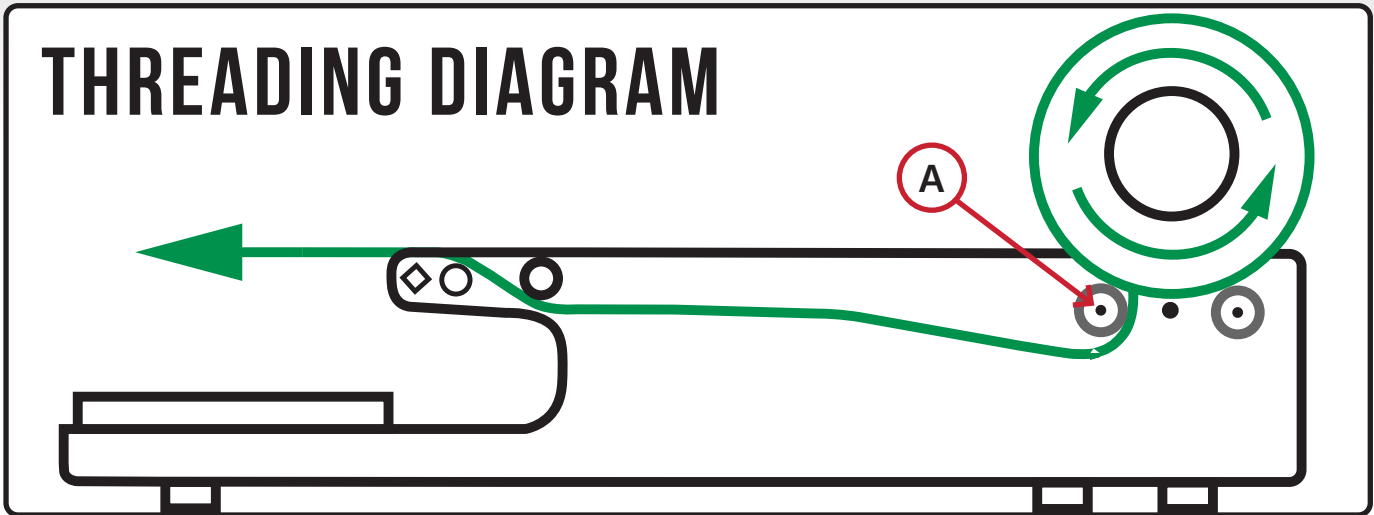

1. Facing the tension knob (A) side of the machine, the film should come off the roll counter-clockwise and pass in-between the two rollers it sits on.
2. Pull the film under the wrapping bridge and cut it with the hot rod.
3. The black tension knob (A) can be adjusted for proper tension on the film.

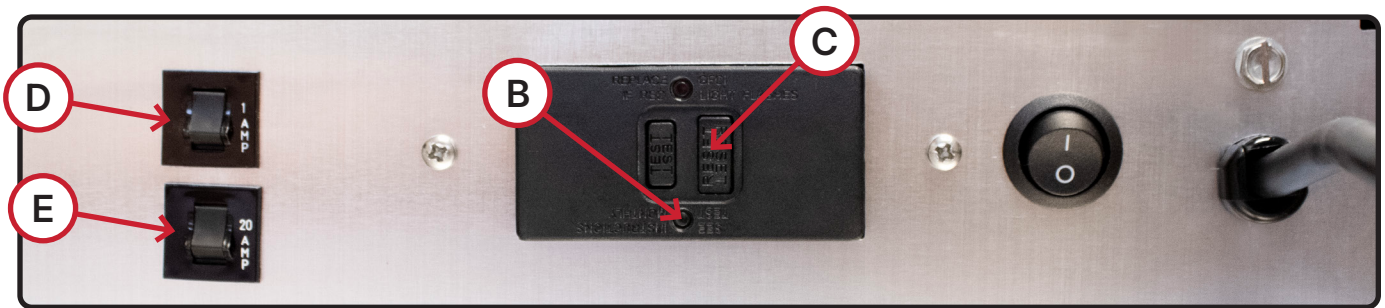

TROUBLESHOOTING TIPS

Symptom	First Check
No power to the unit	Verify power from the wall outlet. Check the GFCI outlet located on the back of the electrical box. With the unit plugged in, if the red light (B) is lit, press the Reset Button (C).
No power to the film cut-off rod	Turn off the unit, reset the 1 amp circuit breaker (D).
No power to the seal plate	Turn off the unit, reset the 20 amp circuit breaker (E).
If lack of power to the unit persists, call your local Heat Seal service provider.	